


# Art In A Pinch

PO Box 416  
Hackensack, MN 56452

1-888-369-4500

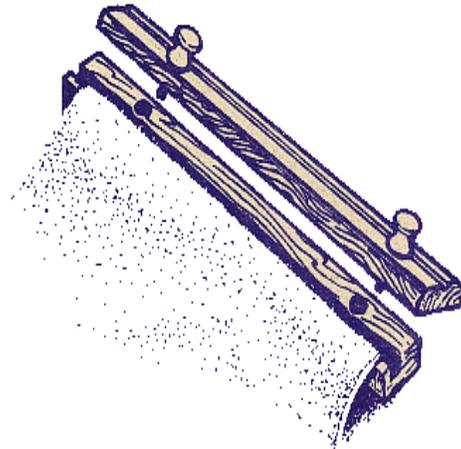

## ***INSTRUCTIONS FOR HANGING YOUR QUILT OR RUG IN YOUR NEW "MINI" HANGER***

*Note:* If you purchased an unfinished hanger and have finished it yourself we recommend that you protect your quilt or rug from your finish. If you have any questions give us a call.

1. Use a slightly damp clean cloth to remove any dust on the hanger.
2. There is a keyhole slot on the backside of the hanger. You may choose to use a drywall anchor if placement does not align with the stud inside your wall. Fasten a screw in your wall at the place you would like the center of your hanger to be. Leave the screw head slightly out from the wall surface.
3. Take only the back piece of the hanger and try placing it on the screw. The screw may have to be adjusted in or out from the wall surface so that the keyhole slot can engage. The hanger should lay flat on the wall. When the screw is properly aligned, take the back piece down and lay it on a table or the floor with the grooved side facing you. Place your quilt or rug so that the top binding lays in the groove and does not cover the holes for the knobs.
4. Now place the front part of the hanger on top of the quilt or rug. Make sure that the numbers or letters on the inside of the hanger are facing each other, not end for end. Screw in the knobs, tightening until there is enough tension to hold the quilt or rug. Place the assembled hanger over the head of the screw and pull down until it engages in the keyhole slot.

If you have hung an extremely thick rug or quilt and are having any problems, please feel free to call us and we should be able to help you solve the problem.